


ETS 42

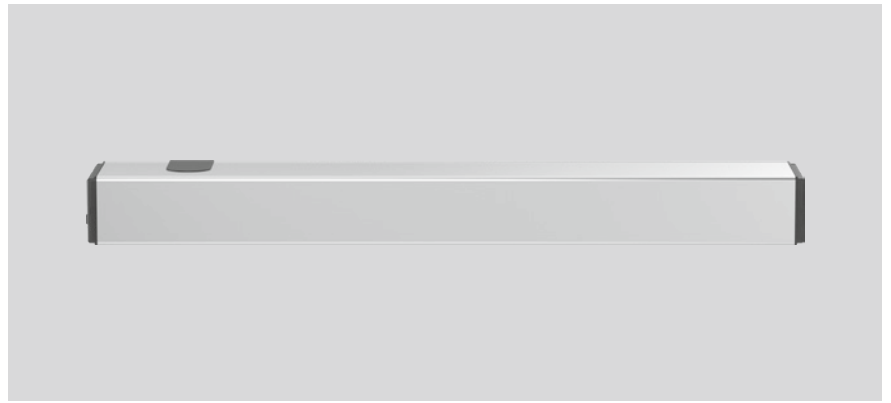

ETS 42

- Electric motor swing door drive EN 2-4, for doors up to 150 kg, without FS/RS requirement.
- Height 70 mm, width 730 mm, depth 125 mm. Weight 8.2 kg
- Ambient temperature -15 to +50°, max. relative humidity 85%, IP 20
- Mains power: 230 VAC, 50 Hz, 10/13A, power consumption max. 350W.
- Output power: 24 VDC, max. 1.4A
- Lintel depth max. 250 mm (SGS), 150 mm (GS)
- Door opening angle max. 105°
- Hold-open time 0...60 s / 0...180 s.
- Motor damping continuously adjustable without power (potentiometer)
- Additional functions: Servo support, Push & Go, Low Energy
- Design: Cover hood stainless steel matt brushed

ETS 42 (ER)

5030053933

ETS 42 sets ■ Single- and double-leaf

Set ETS-42-SGS-AV30-Flat (ER)

5030054609

Single-leaf swing door drive set, comprising:

- 1 x ETS 42 (ER)
- 1 x SGS ETS 250-ER
- 1 x AV 30-ER
- 1 x FlatScan set, black

Set ETS-42-GS-ÖB-AV30-Flat (ER)

5030054611

Single-leaf swing door drive BG set, comprising:

- 1 x ETS 42 (ER)
- 1 x GS-ÖB-620-ER
- 1 x AV 30-ER
- 1 x FlatScan set, black

Set ETS-42-2-SGS-AV-30-Flat (ER)

5030066458

Single-leaf swing door drive set, comprising:

- 2 x ETS 42
- 2 x SGS 250
- 2 x AV-30-ER
- 2 x FlatScan sets, black
- 1 x V-ETS 42 (ER)

Set ETS-42-2-GS-ÖB-AV30-Flat V-ETS (ER)

5030055454

Double-leaf swing door drive set, comprising:

- 2 x ETS 42 (ER)
- 2 x GS-ÖB-620-ER
- 2 x AV 30-ER
- 2 x FlatScan sets, black
- 1 x V-ETS 42 (ER)

ECO Schulte GmbH & Co. KG

Iserlohner Landstraße 89

D-58706 Menden

Telephone +49 2373 9276 - 0

Telefax +49 2373 9276 - 40

info@eco-schulte.de

www.eco-schulte.de

Our compendium represents a compilation of all products from our range of services. These are subject to different delivery classes. Special variants included are often manufactured to customer specifications and sometimes require longer delivery times and minimum purchase quantities. Further advise can be given by your contact person.

■ SYSTEM TECHNOLOGY FOR THE DOOR

